

Standard equipment:

- Plug-in (internal compressor)
- Innovative food protection technology - T102
- Touch control panel
- HACCP temperature recorder
- Dynamic cooling with monoblock
- Automatic defrost
- Automatic condensate evaporation
- Exterior made of AISI 304 steel
- Solid door
- Self-closing door
- Magnetic gasket
- Door-lock
- Adjustable legs made of INOX
- Interior with pressed bottom & water outflow
- Interior made of AISI 304 steel
- INOX shelves
- Interior adapted to GN containers
- Internal LED light

Optional equipment:




- Glass door
- Set of castors
- English socket
- Shelves made of stainless steel
- Interior adapted to 600x400 bakery trays



finalist
of the competition



2016

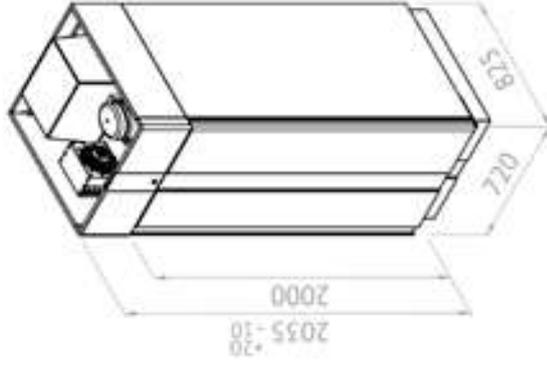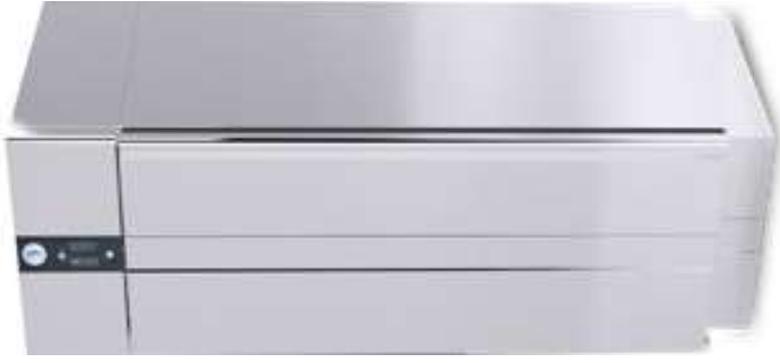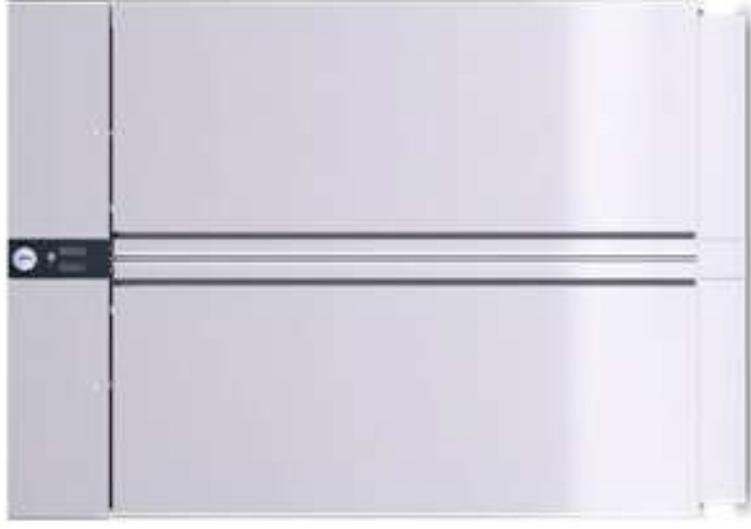

MODEL	TEMP. RANGE [°C]	AMBIENT CONDITIONS [°C/RH]	CAPACITY [l]	DIMENSIONS L x D x H [mm]	NUMBER OF DOORS	NUMBER OF SHELVES	SHELF DIMENSIONS [mm]	POWER SUPPLY [V/Hz]	ENERGY CONSUMPTION [kWh/24]	NET WEIGHT [kg]	INSULATION THICKNESS [mm]	REFRI-GERANT
PRO C500	-2...+8	+40/40%	523	640x826x2090	1	3	650x430	230 / 50	2.8	116	70	R-290
PRO C700	-2...+8	+40/40%	626	740x826x2090	1	3	650x530	230 / 50	2.95	127	70	R-290
PRO C1400	-2...+8	+40/40%	1376	1480x826x2090	2	6	650x530	230 / 50	8.13	178	70	R-290
PRO F500	-18...-20	+40/40%	523	640x826x2090	1	3	650x430	230 / 50	8.7	114	70	R-290
PRO F700	-18...-20	+40/40%	626	740x826x2090	1	3	650x530	230 / 50	9.2	121	70	R-290
PRO F1400	-18...-20	+40/40%	1376	1480x826x2090	2	6	650x530	230 / 50	15.1	188	70	R-290