



## Blast Chiller

## GBC10X



Label not  
required



Item number	6332871000GBC10X	Taric goods code	8418501190
EAN code	5704704016385	QTY in 40HQ	32


### Short Description

Cycles can be controlled by time or by temperature according to the reading of the temperature probe inside the product. If no probe is in use, time control is applied automatically. Once chilling / freezing cycle is over, devices enter in standby mode, working as refrigerator keeping the temperature between +2 and +5° after chilling and below -18° after freezing cycle. “Ventilation gill” on the front panel to keep cooling unit system ventilated and working more efficiently. Automatic defrosting device and automatic, no energy consumption in the evaporation of condensation. Hinged door with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and closes automatically at less than 90°.

### Key features

- Fast chilling +90°C to +3°C in 90 min
- Fast freezing +90°C to -18°C in 240 min
- Suitable for 10 pcs. GN 1/1
- Probe to monitor the temperature of the product
- Self-closing door with 120° dwell position
- AISI 304 stainless steel internally
- AISI 201 stainless steel externally
- Also available as 60 Hz for marine / offshore as an order item

### Measurement Drawings

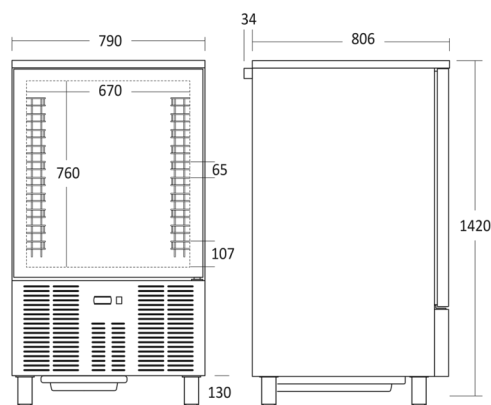

### Dimensions and weight

Product dimensions, HxWxD, mm	1420 x 800 x 790
Product depth w/handle, mm	800
Packaging dimensions, HxWxD, mm	1640 x 810 x 895
Gross volume, L	254
Net volume, L	219
Gross- / Net volume, L	254 / 219
Internal dimensions, HxWxD, mm	784 x 670 x 680
Gross- / Net weight, kg	160 / 153

### Performance and consumption

Energy efficiency class	Label not required
Refrigeration / freezing technique	Ventilated
Climate class	4
Type of refrigerant / gas gr.	R452a / 1100
Temperature range °C	3 / -18
NoFrost	Yes
Energy efficiency class	-

### Installation and power

Voltage / hertz, V/hz	220-240V / 50hz
No. of electrical phases	1L+N
Watt / Ampere, W/A	1300 / 9.1
Length of Powercord, cm	300

### Design and comfort

Controller	Electronic
Control panel	Outside
Digital display	Yes
Internal light	No light
External thermometer	Yes
Door- / lid type	Right hinged
Handle	Integrated
Number of feet	4
Number of castors, pcs	0
Lock & Key	No

### Colour and material

Outside colour	Stainless Steel
Inside Colour	Stainless Steel
Colour and material of door/lid	Stainless steel solid

### Features

Number of shelves	0
Adjustable shelves	Yes

# scandomestic

Scandomestic A/S . Linåvej 20 . DK-8600 Silkeborg . Tel.: +45 7242 5571 . [www.scandomestic.dk](http://www.scandomestic.dk)